

Drinking Water Test Report

To:	Dairy Flat School
From:	Waste Management–Redvale
Sampling Date:	30 June 2026
Sampling Locations:	Staff Room (Figure 1), Health Room (Figure 2), Hall Kitchen (Figure 3)
Sampling Source:	Water Tap
Analytical Institution:	Hill Laboratories

Executive Summary

The June 2026 drinking water results confirm that the water quality at all three locations remains microbiologically safe and chemically compliant with the New Zealand Drinking Water Standards for the parameters tested.

Measured pH values remained below the aesthetic guideline range and were consistent with previous monitoring results. The low pH is attributed to the naturally low mineral content of the rainwater supply and local plumbing conditions. As pH is an aesthetic (non-health-based) parameter, the observed values are not considered to present a risk to drinking water safety.

Sampling Method

Routine water quality and E. coli samples were collected in accordance with Hill Laboratories' guidelines. Samples were taken using laboratory-supplied containers without pre-rinsing.

Three tap locations were sampled: the Staff Room, Health Room and Hall Kitchen, as shown in Figures 1–3. The tap outlets were disinfected using alcohol wipes and flushed for approximately 2–3 minutes before sample collection. Samples were then collected directly into the laboratory-supplied containers and securely capped.

For microbiological analysis, sterile containers were used and aseptic techniques were followed. The inside of the containers and lids were not touched, and samples were filled to within approximately 1 cm of the top.

Following collection, samples were refrigerated (not frozen) and stored in a chilled, dark container with ice packs to maintain temperatures below 10°C. All samples were labelled with the date and time of collection and transported to the laboratory within 24 hours.



Figure 1. Staff Room



Figure 2. Health Room



Figure 3. Hall Kitchen

Drinking Water Test Report

Analysis of Results

A summary of the June 2026 test results, together with comparisons with monitoring results from October 2025 to June 2026, and relevant New Zealand, WHO, and US EPA drinking water standards, is presented in Tables 1 and 2. The original Hill Laboratories reports are appended to this report.

The June 2026 laboratory results indicate that all samples were microbiologically safe, with *Escherichia coli* not detected at any of the three sampling locations, with results of <1 MPN/100 mL. This confirms there was no microbiological evidence of faecal contamination in the samples collected and indicate that the water treatment and distribution system continued to operate effectively at the time of sampling.

Turbidity at all locations remained very low and well below the aesthetic guideline value of 5 NTU. The Staff Room and Hall Kitchen results were below the laboratory reporting limit (<0.05 NTU). The Health Room result is 0.329 NTU, which remains a very low result and does not indicate a meaningful deterioration in water quality. The difference may reflect normal short-term variability associated with sampling conditions, recent water use, minor disturbance of settled material, tank or pipework mixing, or analytical variability.

Electrical conductivity in June show slightly increase comparing to previous months, with 3.2 mS/m in June across all the three locations. The total dissolved salts and several dissolved ions also increased, including sodium, chloride, sulphate, calcium and magnesium. However, the concentrations remain very low and well below the relevant standards for drinking water. The observed variation is considered consistent with normal fluctuations in a roof-collected rainwater system.

All analysed metals, including arsenic, lead, copper, iron, and manganese, were either below detection limits or present at very low concentrations, well within applicable guideline values. Similarly, major ions such as chloride, nitrate, and sulphate were detected at low levels, with no indication of contamination.

Measured pH values in June ranged from 5.7 to 5.9 across the three sampling locations, which were below the aesthetic guideline range (7.0–8.5) and consistent with previous monitoring results (Figure 4). The Staff Room increased slightly, the Health Room decreased slightly, and the Hall Kitchen remained unchanged. These small variations do not indicate a significant change in water quality. Free carbon dioxide was highest in the Hall Kitchen at 8.3 g/m³, corresponding with the lowest pH of 5.7. This supports the interpretation that dissolved carbon dioxide and low buffering capacity are contributing to the mildly acidic conditions. Although the pH is below the aesthetic range, it is not a health-based exceedance. The main potential concern from persistently low pH is increased long-term corrosivity toward plumbing materials.

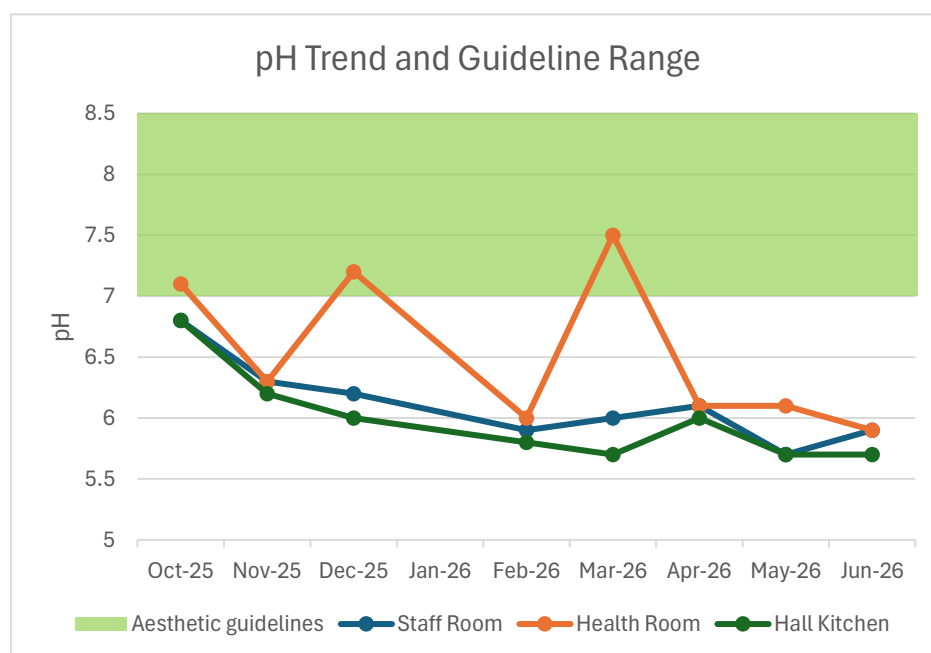


Figure 4. pH Trend with Aesthetic Guideline Range (Oct 2025 – June 2026)

Drinking Water Test Report



Overall, the results confirm that the drinking water quality remains suitable for consumption and compliant with the applicable drinking water standards, with no evidence of contamination. No corrective actions are required at this time, and routine monitoring should continue.

Thanks,

Dr. Na Zhang (she/her)

Environmental Engineer Redvale Landfill – Operational and Technical Services

WM New Zealand Limited
Landfill Access Road, RD4 Albany 0794

P.O. Box 228, Silverdale, Auckland 0944

M: +64 21 225 3226 E: NZhang@wm.nz

www.wm.nz

Drinking Water Test Report



Table 1. Summary of Tap Water Quality Results for October–February 2026 with Comparison to New Zealand, WHO, and US EPA Drinking Water Standards

Parameters	Sample Name: Lab Number:	October 2025			November 2025			December 2025			February 2026			Drinking Water Standards		
		Staff Room 4010395	Health Room 4010401	Hall Kitchen 4010402	Staff Room 4042267	Health Room 4042271	Hall Kitchen 4042265	Staff Room 4058529	Health Room 4058516	Hall Kitchen 4058517	Staff Room 4111982	Health Room 4111989	Hall Kitchen 4111983	NZ Maximum Acceptable Value (MAV) ^a	WHO Limit	US EPA Limit
Escherichia coli	MPN / 100mL	< 1	<1	< 1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1
Turbidity	NTU	0.37	0.41	0.12	0.20	0.21	0.11	0.230	0.277	0.128	0.22	0.19	0.09	≤5 (aesthetic) ^b	<5	<1 (recommended)
pH	pH Units	6.8	7.1	6.8	6.3	6.3	6.2	6.2	7.2	6.0	5.9	6.0	5.8	7.0–8.5 (aesthetic) ^b	6.5–8.5	6.5–8.5
Total Alkalinity	g/m ³ as CaCO ₃	11	13.9	10.6	3.6	3.6	3.4	3.58	6.96	3.18	2.6	2.6	2.4	-	-	-
Free Carbon Dioxide	g/m ³ at 25°C	3.3	2.1	3.4	4.0	3.8	4.2	4.9	<1.0	6.1	7	5.7	7.7	-	-	-
Total Hardness	g/m ³ as CaCO ₃	14.5	16	14.5	2.3	2.5	3.2	1.79	1.79	2.20	2.70	2.60	2.90	≤200 (aesthetic) ^b	<500	<500
Electrical Conductivity (EC)	mS/m	6.4	7.5	6.3	1.6	1.8	1.6	1.0	1.7	1.0	2.6	2.8	2.7	-	-	-
Electrical Conductivity (EC)	µS/cm	64	75	63	16	18	16	10	17	10	26	28	27	-	<1500	<2500
Approx Total Dissolved Salts	g/m ³	43	50	42	11	12	11	6.84	11.69	6.93	17	18	18	≤1000 (aesthetic) ^b	<1000	<500 (aesthetic) ^b
Total Arsenic	g/m ³	< 0.0011	<0.0011	< 0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.01	<0.01	<0.01
Total Boron	g/m ³	< 0.053	<0.053	< 0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<2.4	<2.4	-
Total Calcium	g/m ³	4.4	4.6	4.4	0.57	0.60	0.91	0.438	0.43	0.613	0.36	0.36	0.49	-	-	-
Total Copper	g/m ³	0.037	0.121	0.0038	0.061	0.141	0.0037	0.0694	0.128	0.00424	0.078	0.130	0.0044	<2	<2	<1.3
Total Iron	g/m ³	< 0.021	0.023	< 0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	≤0.3 (aesthetic) ^b	<0.3	<0.3
Total Lead	g/m ³	0.00062	0.00118	0.00028	0.00083	0.00088	0.00061	0.000966	0.001078	0.000604	0.001280	0.001330	0.00046	<0.01	<0.01	<0.015
Total Magnesium	g/m ³	0.87	1.12	0.86	0.22	0.23	0.21	0.170	0.173	0.163	0.43	0.42	0.42	-	-	-
Total Manganese	g/m ³	0.0023	0.0035	0.0012	0.00161	0.00157	0.00093	0.00196	0.00183	0.00151	0.00174	0.00198	0.0026	0.04 (Staining); ≤0.1 (Taste)	<0.4	<0.05 (aesthetic) ^b
Total Potassium	g/m ³	0.53	0.53	0.53	0.187	0.187	0.172	0.137	0.138	0.144	0.25	0.23	0.24	-	-	-
Total Sodium	g/m ³	5.6	5.7	5.6	1.62	1.59	1.52	1.290	1.278	1.298	3.6	3.4	3.6	≤200 (aesthetic) ^b	<200	<20 (health advisory) ^c

Drinking Water Test Report



WM New Zealand

Total Zinc	g/m ³	0.21	0.189	0.154	0.49	0.48	0.175	0.335	0.320	0.189	0.44	0.45	0.36	≤1.5 (aesthetic) ^b	<3	<5
Chloride	g/m ³	9	9.6	9	2.6	2.6	2.7	2.53	2.29	2.16	6.0	5.6	6.0	≤250 (aesthetic) ^b	<250	<250
Nitrate-N	g/m ³	0.07	0.07	0.08	0.09	0.09	0.11	0.147	0.126	0.171	0.15	0.15	0.16	<11.3	<11.3	<10
Sulphate	g/m ³	4.3	4.6	4.3	0.8	0.8	0.8	0.76	0.77	0.69	1.2	1.2	1.2	≤250 (aesthetic) ^b	<250	<250

^a Taken from the 'Water Services (Drinking Water Standards for New Zealand) Regulations 2022'.

^b Taken from 'Aesthetic Value for Drinking Water Notice 2022' issued by the Water Services Regulator ("Taumata Arowai")

^c Refer to non-health-related parameters — things that affect the taste, smell, colour, or appearance of water but don't pose a health risk.

Drinking Water Test Report



WM New Zealand

Table 2. Summary of Tap Water Quality Results for March–June 2026, with Comparison to New Zealand, WHO, and US EPA Drinking Water Standards

Parameters	Sample Name: Lab Number:	March 2026			April 2026			May 2026			June 2026			Drinking Water Standards		
		Staff Room	Health Room	Hall Kitchen	Staff Room	Health Room	Hall Kitchen	Staff Room	Health Room	Hall Kitchen	Staff Room	Health Room	Hall Kitchen	NZ Maximum Acceptable Value (MAV) ^a	WHO Limit	US EPA Limit
Escherichia coli	MPN / 100mL	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1
Turbidity	NTU	0.21	0.29	0.10	0.22	0.19	0.17	0.15	0.17	0.073	<0.05	0.329	<0.05	≤5 (aesthetic) ^b	<5	<1 (recommended)
pH	pH Units	6.0	7.5	5.7	6.1	6.1	6.0	5.7	6.1	5.7	5.9	5.9	5.7	7.0–8.5 (aesthetic) ^b	6.5–8.5	6.5–8.5
Total Alkalinity	g/m ³ as CaCO ₃	2.20	6.6	2.0	2.2	3.2	1.8	2.2	2.8	2.2	2.40	2.40	2.20	-	-	-
Free Carbon Dioxide	g/m ³ at 25°C	4.8	<1.0	7.2	3.4	4.6	3.7	8.1	4.1	8.7	5.6	6.1	8.3	-	-	-
Total Hardness	g/m ³ as CaCO ₃	2.71	2.78	2.8	2.04	2.09	2.07	1.70	1.70	1.74	2.97	2.86	2.95	≤200 (aesthetic) ^b	<500	<500
Electrical Conductivity (EC)	mS/m	2.5	3.2	2.6	2.3	2.3	2.5	1.5	1.6	1.5	3.2	3.2	3.2	-	-	-
Electrical Conductivity (EC)	µS/cm	25	32	26	23	23	25	15	16	15	32	32	32	-	<1500	<2500
Approx Total Dissolved Salts	g/m ³	16.75	21.33	18	15.61	15.48	16.43	10	10	9.83	21.49	21.18	21.49	≤1000 (aesthetic) ^b	<1000	<500 (aesthetic) ^b
Total Arsenic	g/m ³	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.0011	<0.01	<0.01	<0.01
Total Boron	g/m ³	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<0.053	<2.4	<2.4	-
Total Calcium	g/m ³	0.427	0.446	0.49	0.272	0.293	0.325	0.26	0.27	0.298	0.377	0.359	0.401	-	-	-
Total Copper	g/m ³	0.0663	0.0875	0.0063	0.0582	0.0874	0.00643	0.052	0.060	0.00365	0.0430	0.0538	0.00399	<2	<2	<1.3
Total Iron	g/m ³	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	<0.021	≤0.3 (aesthetic) ^b	<0.3	<0.3
Total Lead	g/m ³	0.00102	0.00092	0.00074	0.00130	0.00137	0.00103	0.00096	0.00084	0.00033	0.00106	0.00100	0.00055	<0.01	<0.01	<0.015
Total Magnesium	g/m ³	0.40	0.405	0.38	0.330	0.329	0.306	0.25	0.26	0.241	0.492	0.476	0.472	-	-	-
Total Manganese	g/m ³	0.00176	0.00177	0.0028	0.00076	0.00087	0.00167	0.00088	0.00108	0.00146	0.00080	0.00073	0.00173	0.04 (Staining); ≤0.1(Taste)	<0.4	<0.05 (aesthetic) ^b
Total Potassium	g/m ³	0.237	0.24	0.23	0.168	0.173	0.170	0.117	0.118	0.118	0.187	0.193	0.192	-	-	-
Total Sodium	g/m ³	3.20	3.22	3.2	3.36	3.46	3.45	2.0	1.98	2.01	3.96	3.93	3.98	≤200 (aesthetic) ^b	<200	<20 (health advisory) ^c

Drinking Water Test Report



WM New Zealand

Total Zinc	g/m ³	0.387	0.399	0.35	0.382	0.371	0.310	0.28	0.29	0.274	0.661	0.656	0.563	≤1.5 (aesthetic) ^b	<3	<5
Chloride	g/m ³	5.62	5.6	5.8	5.48	5.18	5.51	3.4	3.4	3.37	7.01	6.99	7.04	≤250 (aesthetic) ^b	<250	<250
Nitrate-N	g/m ³	0.170	0.17	0.2	0.091	0.085	0.092	0.13	0.13	0.12	0.125	0.125	0.128	<11.3	<11.3	<10
Sulphate	g/m ³	1.12	1.08	1.1	0.88	0.85	0.88	0.8	0.8	0.74	1.20	1.19	1.20	≤250 (aesthetic) ^b	<250	<250

^a Taken from the 'Water Services (Drinking Water Standards for New Zealand) Regulations 2022'.

^b Taken from 'Aesthetic Value for Drinking Water Notice 2022' issued by the Water Services Regulator ("Taumata Arowai")

^c Refer to non-health-related parameters — things that affect the taste, smell, colour, or appearance of water but don't pose a health risk.

Certificate of Analysis

Page 1 of 3

Client:	Waste Management NZ Limited	Lab No:	4254466	DWMAVUPv1
Contact:	Na Zhang	Date Received:	01-Jul-2026	
	C/- Waste Management NZ Limited	Date Reported:	03-Jul-2026	
	PO Box 228	Quote No:	141146	
	Silverdale	Order No:	3895609	
	Auckland 0944	Client Reference:	031 Drinkingwater-DFS-SR (June 2026)	
		Add. Client Ref:	DWSNZ Compliance – Roof/Rain Routine Water + E. coli	
		Submitted By:	Na Zhang	

Sample Type: Drinking Water for DWSNZ Compliance

Sample Name:		DrinkingWater-DFS-SR 30-Jun-2026 1:00 pm	Maximum Acceptable Value	Outside Limits
Lab Number:		4254466.1		
Routine Water + E.coli profile Kit				
Escherichia coli	MPN / 100mL	< 1	< 1	No
Routine Water Profile				
Turbidity	NTU	< 0.05 ± 0.034	-	-
pH	pH Units	5.9 ± 0.2	-	-
Total Alkalinity	g/m ³ as CaCO ₃	2.40 ± 0.67	-	-
Free Carbon Dioxide	g/m ³ at 25°C	5.6 ± 3.3	-	-
Total Hardness	g/m ³ as CaCO ₃	2.97 ± 0.20	-	-
Electrical Conductivity (EC)	mS/m	3.2 ± 0.1	-	-
Electrical Conductivity (EC)	µS/cm	32 ± 1	-	-
Approx Total Dissolved Salts	g/m ³	21.49 ± 0.59	-	-
Total Arsenic	g/m ³	< 0.0011 ± 0.00074	0.01	No
Total Boron	g/m ³	< 0.053 ± 0.036	2.4	No
Total Calcium	g/m ³	0.377 ± 0.039	-	-
Total Copper	g/m ³	0.0430 ± 0.0044	2	No
Total Iron	g/m ³	< 0.021 ± 0.014	-	-
Total Lead	g/m ³	0.001063 ± 0.000097	0.01	No
Total Magnesium	g/m ³	0.492 ± 0.042	-	-
Total Manganese	g/m ³	0.00080 ± 0.00036	0.4	No
Total Potassium	g/m ³	0.187 ± 0.037	-	-
Total Sodium	g/m ³	3.96 ± 0.24	-	-
Total Zinc	g/m ³	0.661 ± 0.053	-	-
Chloride	g/m ³	7.01 ± 0.55	-	-
Nitrate-N	g/m ³	0.125 ± 0.043	11.3	No
Sulphate	g/m ³	1.20 ± 0.35	-	-



This Laboratory is accredited by International Accreditation New Zealand (IANZ), which represents New Zealand in the International Laboratory Accreditation Cooperation (ILAC). Through the ILAC Mutual Recognition Arrangement (ILAC-MRA) this accreditation is internationally recognised. The tests reported herein have been performed in accordance with the terms of accreditation, with the exception of tests marked * or any comments and interpretations, which are not accredited.

Note: The Maximum Acceptable Values (MAV) are taken from the 'Water Services (Drinking Water Standards for New Zealand) Regulations 2022', published under the authority of the New Zealand Government-2022. Copies of this publication are available from: <https://www.legislation.govt.nz/regulation/public/2022/0168/latest/whole.html>

The standards set limits for the concentration of determinands in drinking water. The Maximum Acceptable Values (MAVs) for any determinand must not be exceeded at any time.

Under Section 73 (2) of the Water Services Act 2021, the laboratory is required to report the results of any analysis or test carried out (for the purposes of testing for compliance with the Drinking Water Standards for New Zealand 2022) that indicates any non-compliance (transgression) with the Maximum Acceptable Values (MAVs) to Taumata Arowai, the water services regulator for Aotearoa.

Taumata Arowai also publishes 'Aesthetic Values for Drinking Water Notice 2022' which specifies or provides minimum or maximum values for substances and other characteristics that relate to the acceptability of drinking water to consumers (such as appearance, taste or odour). This report compares the results obtained with the Maximum Acceptable Values only.

The reported uncertainty is an expanded uncertainty with a level of confidence of approximately 95 percent (i.e. two standard deviations, calculated using a coverage factor of 2). Reported uncertainties are calculated from the performance of typical matrices, and do not include variation due to sampling. For further information on uncertainty of measurement at Hill Laboratories, refer to the technical note on our website: www.hill-laboratories.com/files/Intro_To_UOM.pdf, or contact the laboratory.

Note that the units: g/m³ are the same as mg/L and ppm.

Summary of Methods

The following table(s) gives a brief description of the methods used to conduct the analyses for this job. The detection limits given below are those attainable in a relatively simple matrix. Detection limits may be higher for individual samples should insufficient sample be available, or if the matrix requires that dilutions be performed during analysis. A detection limit range indicates the lowest and highest detection limits in the associated suite of analytes. A full listing of compounds and detection limits are available from the laboratory upon request. Unless otherwise indicated, analyses were performed at Hill Labs, 28 Duke Street, Frankton, Hamilton 3204.

Sample Type: Drinking Water for DWSNZ Compliance			
Test	Method Description	Default Detection Limit	Sample No
Routine Water Profile		-	1
Filtration, Unpreserved	Sample filtration through 0.45µm membrane filter.	-	1
Total Digestion	Nitric acid digestion. APHA 3030 E (modified) : Online Edition.	-	1
Turbidity	Analysis by Mantech PC-1000-1118 Turbidity meter. APHA 2130 B (modified) : Online Edition.	0.05 NTU	1
pH	pH meter. APHA 4500-H ⁺ B (modified) : Online Edition. Note: It is not possible to achieve the APHA Maximum Storage Recommendation for this test (15 min) when samples are analysed upon receipt at the laboratory, and not in the field. Samples and Standards are analysed at an equivalent laboratory temperature (typically 18 to 22 °C). Temperature compensation is used.	0.1 pH Units	1
Total Alkalinity	Titration to pH 4.5 (M-alkalinity), autotitrator. APHA 2320 B (modified for Alkalinity <20) : Online Edition.	1.0 g/m ³ as CaCO ₃	1
Free Carbon Dioxide	Calculation: from alkalinity and pH, valid where TDS is not >500 mg/L and alkalinity is almost entirely due to hydroxides, carbonates or bicarbonates. APHA 4500-CO ₂ D : Online Edition.	1.0 g/m ³ at 25°C	1
Total Hardness	Calculation from Total Calcium and Total Magnesium. APHA 2340 B : Online Edition.	1.0 g/m ³ as CaCO ₃	1
Electrical Conductivity (EC)	Conductivity meter, 25°C. APHA 2510 B : Online Edition.	0.1 mS/m	1
Electrical Conductivity (EC)	Conductivity meter, 25°C. APHA 2510 B : Online Edition.	1 µS/cm	1
Approx Total Dissolved Salts	Calculation: from Electrical Conductivity.	2 g/m ³	1
Total Arsenic	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.0011 g/m ³	1
Total Boron	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1
Total Calcium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1
Total Copper	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00053 g/m ³	1
Total Iron	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Lead	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00011 g/m ³	1
Total Magnesium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Manganese	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00053 g/m ³	1
Total Potassium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1

Sample Type: Drinking Water for DWSNZ Compliance			
Test	Method Description	Default Detection Limit	Sample No
Total Sodium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Zinc	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.0011 g/m ³	1
Chloride	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.5 g/m ³	1
Nitrate-N	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.05 g/m ³	1
Sulphate	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.5 g/m ³	1
Escherichia coli	MPN count using Colilert (Incubated at 35°C for 24 hours) and 97 wells. APHA 9223 B : Online Edition.	1 MPN / 100mL	1

These samples were collected by yourselves (or your agent) and analysed as received at the laboratory.

Testing was completed between 01-Jul-2026 and 03-Jul-2026. For completion dates of individual analyses please contact the laboratory.

Samples are held at the laboratory after reporting for a length of time based on the stability of the samples and analytes being tested (considering any preservation used), and the storage space available. Once the storage period is completed, the samples are discarded unless otherwise agreed with the customer. Extended storage times may incur additional charges.

This certificate of analysis must not be reproduced, except in full, without the written consent of the signatory.

Ara Heron BSc (Tech)
Client Services Manager - Environmental

Certificate of Analysis

Page 1 of 3

Client:	Waste Management NZ Limited	Lab No:	4254468	DWMAVUPv1
Contact:	Na Zhang	Date Received:	01-Jul-2026	
	C/- Waste Management NZ Limited	Date Reported:	03-Jul-2026	
	PO Box 228	Quote No:	141146	
	Silverdale	Order No:	3895611	
	Auckland 0944	Client Reference:	032 DrinkingWater-DFS-HR (June 2026)	
		Add. Client Ref:	DWSNZ Compliance – Roof/Rain Routine Water + E. coli	
		Submitted By:	Na Zhang	

Sample Type: Drinking Water for DWSNZ Compliance

Sample Name:		DrinkingWater-DFS-HR 30-Jun-2026 1:15 pm	Maximum Acceptable Value	Outside Limits
Lab Number:		4254468.1		
Routine Water + E.coli profile Kit				
Escherichia coli	MPN / 100mL	< 1	< 1	No
Routine Water Profile				
Turbidity	NTU	0.329 ± 0.047	-	-
pH	pH Units	5.9 ± 0.2	-	-
Total Alkalinity	g/m ³ as CaCO ₃	2.40 ± 0.67	-	-
Free Carbon Dioxide	g/m ³ at 25°C	6.1 ± 3.6	-	-
Total Hardness	g/m ³ as CaCO ₃	2.86 ± 0.20	-	-
Electrical Conductivity (EC)	mS/m	3.2 ± 0.1	-	-
Electrical Conductivity (EC)	µS/cm	32 ± 1	-	-
Approx Total Dissolved Salts	g/m ³	21.18 ± 0.59	-	-
Total Arsenic	g/m ³	< 0.0011 ± 0.00074	0.01	No
Total Boron	g/m ³	< 0.053 ± 0.036	2.4	No
Total Calcium	g/m ³	0.359 ± 0.039	-	-
Total Copper	g/m ³	0.0538 ± 0.0054	2	No
Total Iron	g/m ³	< 0.021 ± 0.014	-	-
Total Lead	g/m ³	0.000997 ± 0.000095	0.01	No
Total Magnesium	g/m ³	0.476 ± 0.041	-	-
Total Manganese	g/m ³	0.00073 ± 0.00036	0.4	No
Total Potassium	g/m ³	0.193 ± 0.038	-	-
Total Sodium	g/m ³	3.93 ± 0.24	-	-
Total Zinc	g/m ³	0.656 ± 0.053	-	-
Chloride	g/m ³	6.99 ± 0.54	-	-
Nitrate-N	g/m ³	0.125 ± 0.043	11.3	No
Sulphate	g/m ³	1.19 ± 0.35	-	-

Note: The Maximum Acceptable Values (MAV) are taken from the 'Water Services (Drinking Water Standards for New Zealand) Regulations 2022', published under the authority of the New Zealand Government-2022. Copies of this publication are available from: <https://www.legislation.govt.nz/regulation/public/2022/0168/latest/whole.html>

The standards set limits for the concentration of determinands in drinking water. The Maximum Acceptable Values (MAVs) for any determinand must not be exceeded at any time.

Under Section 73 (2) of the Water Services Act 2021, the laboratory is required to report the results of any analysis or test carried out (for the purposes of testing for compliance with the Drinking Water Standards for New Zealand 2022) that indicates any non-compliance (transgression) with the Maximum Acceptable Values (MAVs) to Taumata Arowai, the water services regulator for Aotearoa.

Taumata Arowai also publishes 'Aesthetic Values for Drinking Water Notice 2022' which specifies or provides minimum or maximum values for substances and other characteristics that relate to the acceptability of drinking water to consumers (such as appearance, taste or odour). This report compares the results obtained with the Maximum Acceptable Values only.

The reported uncertainty is an expanded uncertainty with a level of confidence of approximately 95 percent (i.e. two standard deviations, calculated using a coverage factor of 2). Reported uncertainties are calculated from the performance of typical matrices, and do not include variation due to sampling. For further information on uncertainty of measurement at Hill Laboratories, refer to the technical note on our website: www.hill-laboratories.com/files/Intro_To_UOM.pdf, or contact the laboratory.

Note that the units: g/m³ are the same as mg/L and ppm.

Summary of Methods

The following table(s) gives a brief description of the methods used to conduct the analyses for this job. The detection limits given below are those attainable in a relatively simple matrix. Detection limits may be higher for individual samples should insufficient sample be available, or if the matrix requires that dilutions be performed during analysis. A detection limit range indicates the lowest and highest detection limits in the associated suite of analytes. A full listing of compounds and detection limits are available from the laboratory upon request. Unless otherwise indicated, analyses were performed at Hill Labs, 28 Duke Street, Frankton, Hamilton 3204.

Sample Type: Drinking Water for DWSNZ Compliance			
Test	Method Description	Default Detection Limit	Sample No
Routine Water Profile		-	1
Filtration, Unpreserved	Sample filtration through 0.45µm membrane filter.	-	1
Total Digestion	Nitric acid digestion. APHA 3030 E (modified) : Online Edition.	-	1
Turbidity	Analysis by Mantech PC-1000-1118 Turbidity meter. APHA 2130 B (modified) : Online Edition.	0.05 NTU	1
pH	pH meter. APHA 4500-H ⁺ B (modified) : Online Edition. Note: It is not possible to achieve the APHA Maximum Storage Recommendation for this test (15 min) when samples are analysed upon receipt at the laboratory, and not in the field. Samples and Standards are analysed at an equivalent laboratory temperature (typically 18 to 22 °C). Temperature compensation is used.	0.1 pH Units	1
Total Alkalinity	Titration to pH 4.5 (M-alkalinity), autotitrator. APHA 2320 B (modified for Alkalinity <20) : Online Edition.	1.0 g/m ³ as CaCO ₃	1
Free Carbon Dioxide	Calculation: from alkalinity and pH, valid where TDS is not >500 mg/L and alkalinity is almost entirely due to hydroxides, carbonates or bicarbonates. APHA 4500-CO ₂ D : Online Edition.	1.0 g/m ³ at 25°C	1
Total Hardness	Calculation from Total Calcium and Total Magnesium. APHA 2340 B : Online Edition.	1.0 g/m ³ as CaCO ₃	1
Electrical Conductivity (EC)	Conductivity meter, 25°C. APHA 2510 B : Online Edition.	0.1 mS/m	1
Electrical Conductivity (EC)	Conductivity meter, 25°C. APHA 2510 B : Online Edition.	1 µS/cm	1
Approx Total Dissolved Salts	Calculation: from Electrical Conductivity.	2 g/m ³	1
Total Arsenic	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.0011 g/m ³	1
Total Boron	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1
Total Calcium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1
Total Copper	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00053 g/m ³	1
Total Iron	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Lead	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00011 g/m ³	1
Total Magnesium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Manganese	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00053 g/m ³	1
Total Potassium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1

Sample Type: Drinking Water for DWSNZ Compliance			
Test	Method Description	Default Detection Limit	Sample No
Total Sodium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Zinc	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.0011 g/m ³	1
Chloride	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.5 g/m ³	1
Nitrate-N	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.05 g/m ³	1
Sulphate	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.5 g/m ³	1
Escherichia coli	MPN count using Colilert (Incubated at 35°C for 24 hours) and 97 wells. APHA 9223 B : Online Edition.	1 MPN / 100mL	1

These samples were collected by yourselves (or your agent) and analysed as received at the laboratory.

Testing was completed between 01-Jul-2026 and 03-Jul-2026. For completion dates of individual analyses please contact the laboratory.

Samples are held at the laboratory after reporting for a length of time based on the stability of the samples and analytes being tested (considering any preservation used), and the storage space available. Once the storage period is completed, the samples are discarded unless otherwise agreed with the customer. Extended storage times may incur additional charges.

This certificate of analysis must not be reproduced, except in full, without the written consent of the signatory.



Ara Heron BSc (Tech)
Client Services Manager - Environmental

Certificate of Analysis

Page 1 of 5

Client:	Waste Management NZ Limited	Lab No:	4254473	DWAUPv1
Contact:	Na Zhang	Date Received:	01-Jul-2026	
	C/- Waste Management NZ Limited	Date Reported:	03-Jul-2026	
	PO Box 228	Quote No:	141146	
	Silverdale	Order No:	3895612	
	Auckland 0944	Client Reference:	033 DrinkingWater - DFS - HK (June 2026)	
		Add. Client Ref:	Routine Water + E. coli	
		Submitted By:	Na Zhang	

Sample Type: Drinking Water for DWSNZ Compliance

Sample Name:		DrinkingWater - DFS - HK 30-Jun-2026 1:30 pm	Aesthetic Values	Maximum Acceptable Values (MAV)
Lab Number:		4254473.1		
Routine Water + E.coli profile Kit				
Escherichia coli	MPN / 100mL	< 1	-	< 1
Routine Water Profile				
Turbidity	NTU	< 0.05 ± 0.034	≤ 5	-
pH	pH Units	5.7 ± 0.2	7.0 - 8.5	-
Total Alkalinity	g/m ³ as CaCO ₃	2.20 ± 0.67	-	-
Free Carbon Dioxide	g/m ³ at 25°C	8.3 ± 5.0	-	-
Total Hardness	g/m ³ as CaCO ₃	2.95 ± 0.20	≤ 200	-
Electrical Conductivity (EC)	mS/m	3.2 ± 0.1	-	-
Electrical Conductivity (EC)	µS/cm	32 ± 1	-	-
Approx Total Dissolved Salts	g/m ³	21.49 ± 0.59	≤ 1000	-
Total Arsenic	g/m ³	< 0.0011 ± 0.00074	-	0.01
Total Boron	g/m ³	< 0.053 ± 0.036	-	2.4
Total Calcium	g/m ³	0.401 ± 0.039	-	-
Total Copper	g/m ³	0.00399 ± 0.00054	≤ 1	2
Total Iron	g/m ³	< 0.021 ± 0.014	≤ 0.3	-
Total Lead	g/m ³	0.000545 ± 0.000081	-	0.01
Total Magnesium	g/m ³	0.472 ± 0.041	-	-
Total Manganese	g/m ³	0.00173 ± 0.00039	≤ 0.04 (Staining) ≤ 0.10 (Taste)	0.4
Total Potassium	g/m ³	0.192 ± 0.038	-	-
Total Sodium	g/m ³	3.98 ± 0.24	≤ 200	-
Total Zinc	g/m ³	0.563 ± 0.046	≤ 1.5	-
Chloride	g/m ³	7.04 ± 0.55	≤ 250	-
Nitrate-N	g/m ³	0.128 ± 0.043	-	11.3
Sulphate	g/m ³	1.20 ± 0.35	≤ 250	-



This Laboratory is accredited by International Accreditation New Zealand (IANZ), which represents New Zealand in the International Laboratory Accreditation Cooperation (ILAC). Through the ILAC Mutual Recognition Arrangement (ILAC-MRA) this accreditation is internationally recognised. The tests reported herein have been performed in accordance with the terms of accreditation, with the exception of tests marked * or any comments and interpretations, which are not accredited.

Note: The Maximum Acceptable Values (MAV) are taken from the 'Water Services (Drinking Water Standards for New Zealand) Regulations 2022', published under the authority of the New Zealand Government-2022. Copies of this publication are available from: <https://www.legislation.govt.nz/regulation/public/2022/0168/latest/whole.html>

The standards set limits for the concentration of determinands in drinking water. The Maximum Acceptable Values (MAVs) for any determinand must not be exceeded at any time.

The Aesthetic Values are taken the publication, 'Aesthetic Values for Drinking Water Notice 2022' issued by the Water Services Regulator ("Taumata Arowai"). Aesthetic values specify or provide minimum or maximum values for substances and other characteristics that relate to the acceptability of drinking water to consumers (such as appearance, taste or odour).

The reported uncertainty is an expanded uncertainty with a level of confidence of approximately 95 percent (i.e. two standard deviations, calculated using a coverage factor of 2). Reported uncertainties are calculated from the performance of typical matrices, and do not include variation due to sampling. For further information on uncertainty of measurement at Hill Laboratories, refer to the technical note on our website: www.hill-laboratories.com/files/Intro_To_UOM.pdf, or contact the laboratory.

Note that the units: g/m³ are the same as mg/L and ppm.

pH/Alkalinity and Corrosiveness Assessment

The pH of a water sample is a measure of its acidity or basicity. Waters with a low pH can be corrosive and those with a high pH can promote scale formation in pipes and hot water cylinders.

The guideline level for pH in drinking water is 7.0-8.5. Below this range the water will be corrosive and may cause problems with disinfection if such treatment is used.

The alkalinity of a water is a measure of its acid neutralising capacity and is usually related to the concentration of carbonate, bicarbonate and hydroxide. Low alkalinities (25 g/m³) promote corrosion and high alkalinities can cause problems with scale formation in metal pipes and tanks.

With the pH and alkalinity levels found it is likely this water will be quite corrosive towards metal piping and fixtures.

Hardness/Total Dissolved Salts Assessment

The water contains a very low amount of dissolved solids and would be regarded as being very soft.

Nitrate Assessment

Nitrate-nitrogen at elevated levels is considered undesirable in natural waters as this element can cause a health disorder called methaemaglobinaemia. Very young infants (less than six months old) are especially vulnerable. The 'Water Services (Drinking Water Standards for New Zealand) Regulations 2022' sets a maximum permissible level of 11.3 g/m³ as Nitrate-nitrogen (50 g/m³ as Nitrate).

Nitrate-nitrogen was detected in this water but at such a low level to not be of concern.

Boron Assessment

Boron may be present in natural waters and if present at high concentrations can be toxic to plants.

Boron was not detected in this water.

Metals Assessment

Iron and manganese are two problem elements that commonly occur in natural waters. These elements may cause unsightly stains and produce a brown/black precipitate. Iron is not toxic but manganese, at concentrations above 0.5 g/m³, may adversely affect health. At concentrations below this it may cause stains on clothing and sanitary ware.

Iron was not detected in the water

Manganese was found in this water at a low level.

Treatment to remove iron and/or manganese should not be necessary.

Bacteriological Tests

The Drinking Water Standards for NZ state that there should be no Escherichia coli (E coli) in water used for human consumption. The presence of these organisms would indicate that other pathogens of faecal origin may be present. Results obtained for Total Coliforms are only significant if the sample has not also been tested for E coli.

Escherichia coli was not detected in this sample.

Final Assessment

The parameter pH did NOT meet the guidelines laid down in the 'Water Services (Drinking Water Standards for New Zealand) Regulations 2022' and the 'Aesthetic Values for Drinking Water Notice 2022' issued by the Water Services Regulator ("Taumata Arowāi") for water which is suitable for drinking purposes.

Summary of Methods

The following table(s) gives a brief description of the methods used to conduct the analyses for this job. The detection limits given below are those attainable in a relatively simple matrix. Detection limits may be higher for individual samples should insufficient sample be available, or if the matrix requires that dilutions be performed during analysis. A detection limit range indicates the lowest and highest detection limits in the associated suite of analytes. A full listing of compounds and detection limits are available from the laboratory upon request. Unless otherwise indicated, analyses were performed at Hill Labs, 28 Duke Street, Frankton, Hamilton 3204.

Sample Type: Drinking Water for DWSNZ Compliance			
Test	Method Description	Default Detection Limit	Sample No
Routine Water Profile		-	1
Filtration, Unpreserved	Sample filtration through 0.45µm membrane filter.	-	1
Total Digestion	Nitric acid digestion. APHA 3030 E (modified) : Online Edition.	-	1
Turbidity	Analysis by Mantech PC-1000-1118 Turbidity meter. APHA 2130 B (modified) : Online Edition.	0.05 NTU	1
pH	pH meter. APHA 4500-H ⁺ B (modified) : Online Edition. Note: It is not possible to achieve the APHA Maximum Storage Recommendation for this test (15 min) when samples are analysed upon receipt at the laboratory, and not in the field. Samples and Standards are analysed at an equivalent laboratory temperature (typically 18 to 22 °C). Temperature compensation is used.	0.1 pH Units	1
Total Alkalinity	Titration to pH 4.5 (M-alkalinity), autotitrator. APHA 2320 B (modified for Alkalinity <20) : Online Edition.	1.0 g/m ³ as CaCO ₃	1
Free Carbon Dioxide	Calculation: from alkalinity and pH, valid where TDS is not >500 mg/L and alkalinity is almost entirely due to hydroxides, carbonates or bicarbonates. APHA 4500-CO ₂ D : Online Edition.	1.0 g/m ³ at 25°C	1
Total Hardness	Calculation from Total Calcium and Total Magnesium. APHA 2340 B : Online Edition.	1.0 g/m ³ as CaCO ₃	1
Electrical Conductivity (EC)	Conductivity meter, 25°C. APHA 2510 B : Online Edition.	0.1 mS/m	1
Electrical Conductivity (EC)	Conductivity meter, 25°C. APHA 2510 B : Online Edition.	1 µS/cm	1
Approx Total Dissolved Salts	Calculation: from Electrical Conductivity.	2 g/m ³	1
Total Arsenic	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.0011 g/m ³	1
Total Boron	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1
Total Calcium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1
Total Copper	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00053 g/m ³	1
Total Iron	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Lead	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00011 g/m ³	1
Total Magnesium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Manganese	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.00053 g/m ³	1
Total Potassium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.053 g/m ³	1
Total Sodium	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.021 g/m ³	1
Total Zinc	Nitric acid digestion, ICP-MS, trace level. APHA 3125 B : Online Edition.	0.0011 g/m ³	1
Chloride	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.5 g/m ³	1
Nitrate-N	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.05 g/m ³	1
Sulphate	Filtered sample. Ion Chromatography. APHA 4110 B (modified) : Online Edition.	0.5 g/m ³	1
Escherichia coli	MPN count using Colilert (Incubated at 35°C for 24 hours) and 97 wells. APHA 9223 B : Online Edition.	1 MPN / 100mL	1

These samples were collected by yourselves (or your agent) and analysed as received at the laboratory.

Testing was completed between 01-Jul-2026 and 03-Jul-2026. For completion dates of individual analyses please contact the laboratory.

Samples are held at the laboratory after reporting for a length of time based on the stability of the samples and analytes being tested (considering any preservation used), and the storage space available. Once the storage period is completed, the samples are discarded unless otherwise agreed with the customer. Extended storage times may incur additional charges.

This certificate of analysis must not be reproduced, except in full, without the written consent of the signatory.



Ara Heron BSc (Tech)
Client Services Manager - Environmental